



Universal, Flush, Exhaust Port Adapter

With: Easy Height, Tilt & Angle Adjustments! Available With Standard Or Performance Duty Hoses.

Patent Pending



Easy Storage On Wall or Columns. Kit Includes Two Stands, Auto Wye Assembly & Storage Bracket. Vertical Post Folds Down For Storage.




Shown Above Is The More Common Wide Apart, Dual Flush Exhaust Ports. The Positioning Of The Capture Hoods Is Fast And Easy To Do. The Wye Connects To Most Existing Exhaust Systems.



For Center, Group Flush Exhaust Vehicles, The Above Offers The Solution To Capture Those Fumes.

[www.sales@ascentssystemsincl.com](mailto:sales@ascentssystemsincl.com)

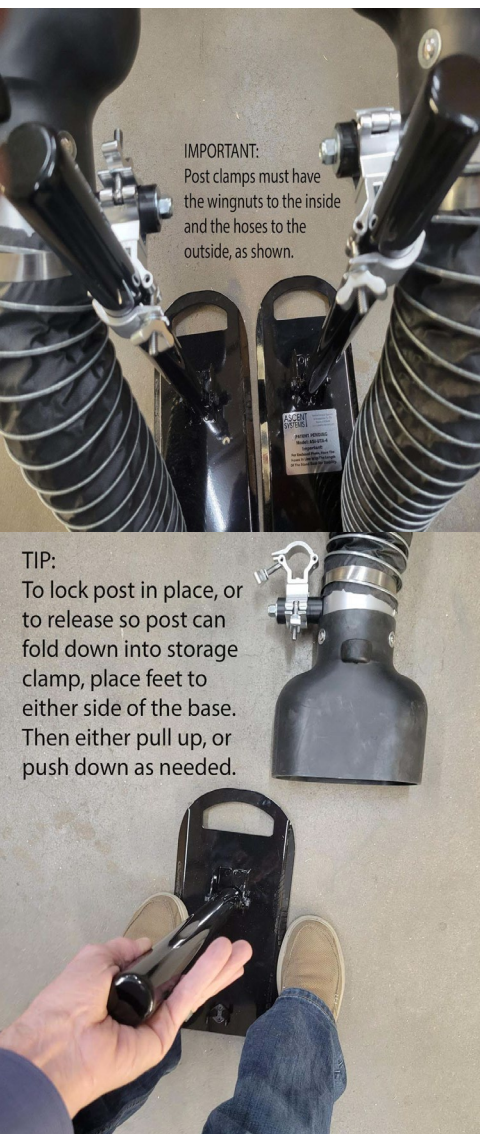

IMPORTANT:
Post clamps must have the wingnuts to the inside and the hoses to the outside, as shown.

TIP:
To lock post in place, or to release so post can fold down into storage clamp, place feet to either side of the base. Then either pull up, or push down as needed.



INSTRUCTIONS:
MAKE SURE FAN IS RUNNING BEFORE USING!

2-Post: Swing up to vertical & push down to lock in place.

2-Floor Bases: As shown, line up length of bases with the "V" shaped hoses for stability.

2-Double Swivel Clamps: Adjust on post for height, tighten and adjust fume capture nozzles flush with exhaust ports, and tighten to correct angle with wing nuts.

1- 4"-6"-4" Wye: As shown, connect into existing exhaust adapter and if hook or stretch connector available, secure wye in place.

Once Done: Disconnect exhaust nozzles from clamps on post, pull up on post to unlock and fold into base clamps, store on wall bracket.

Questions Contact Us At www.sales@ascentsystemsinc.com

**ASCENT
SYSTEMS**