


RX16KLF & KLFPS

Flush Mount Lift Rack




SPECIFICATIONS []

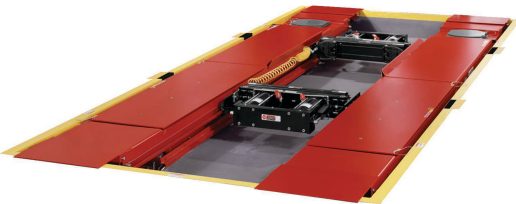

RX16KLFPS

Floor Pocket Requirements	Refer to <i>RF08114-00</i> for details
Power Requirements	208-230 VAC, single phase power, 26 Amp
Air Supply Requirements	130 - 150 psi (9 - 10.3 bar)
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 psi (20,700 kPa) rating
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)
Max Vehicle Weight	16,000 lbs. (7200 kg)
Alignment Height	All lock positions
Min. Four-Wheel Alignment	88 in. (2235 mm)
Lifting Speed	1 speed, 60 seconds
Lowering Speed	2 speed, 25 seconds
Max. Wheelbase	
General Service	201 in. (5105 mm)
Two-Wheel Alignment	195 in. (4953 mm)
Four-Wheel Alignment	168 in. (4013 mm)

Feature	KLF	KLFPS	Dimension	
9000-lb Swing Air Jacks (2)	✓	✓	Outside Width (W1)	92.5 in. (2350 mm)
Two-Speed Lowering	✓	✓	Inside Width (W2)	40 in. (1016 mm)
		✓	Length (L)	237 in. (6020 mm)
		✓	Runway Width (R)	26 in. (660 mm)
			Raised Height (H1)	70 in. (1778 mm)
			Depth (H2)	12.5 - 13 in. (318 - 330 mm)

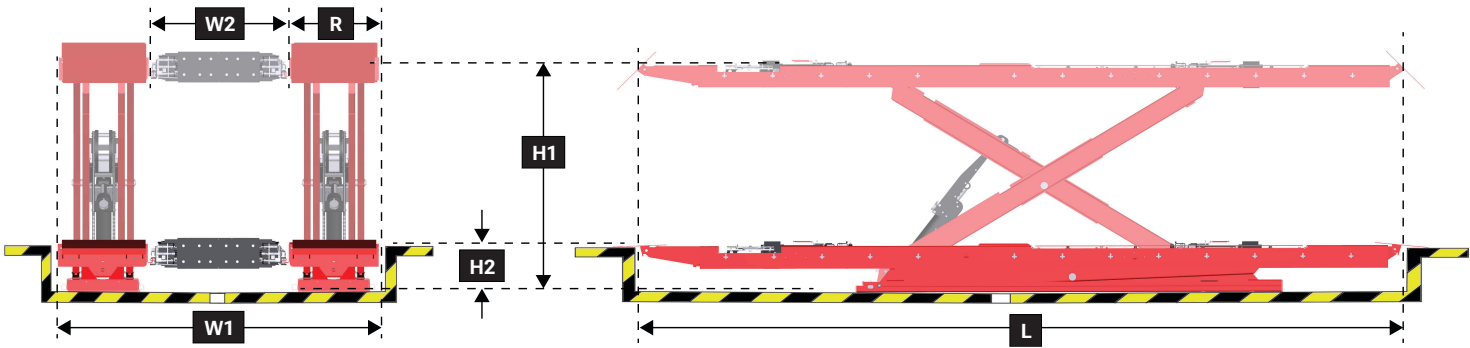

For lift rack information visit:
hunter.com/alignment-racks

For local contact visit:
hunter.com/contact

For general inquiries visit:
www.hunter.com or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.


Form RS08132-00, 07-26
Supersedes Form RS08132-00, 05-24
Copyright ©2024-2026, Hunter Engineering Company

RX16KLF & KLFPS

Flush Mount Lift Rack

HUNTER
Engineering Company

LAYOUT DIAGRAM (refer to RF08114-00 for construction drawings)

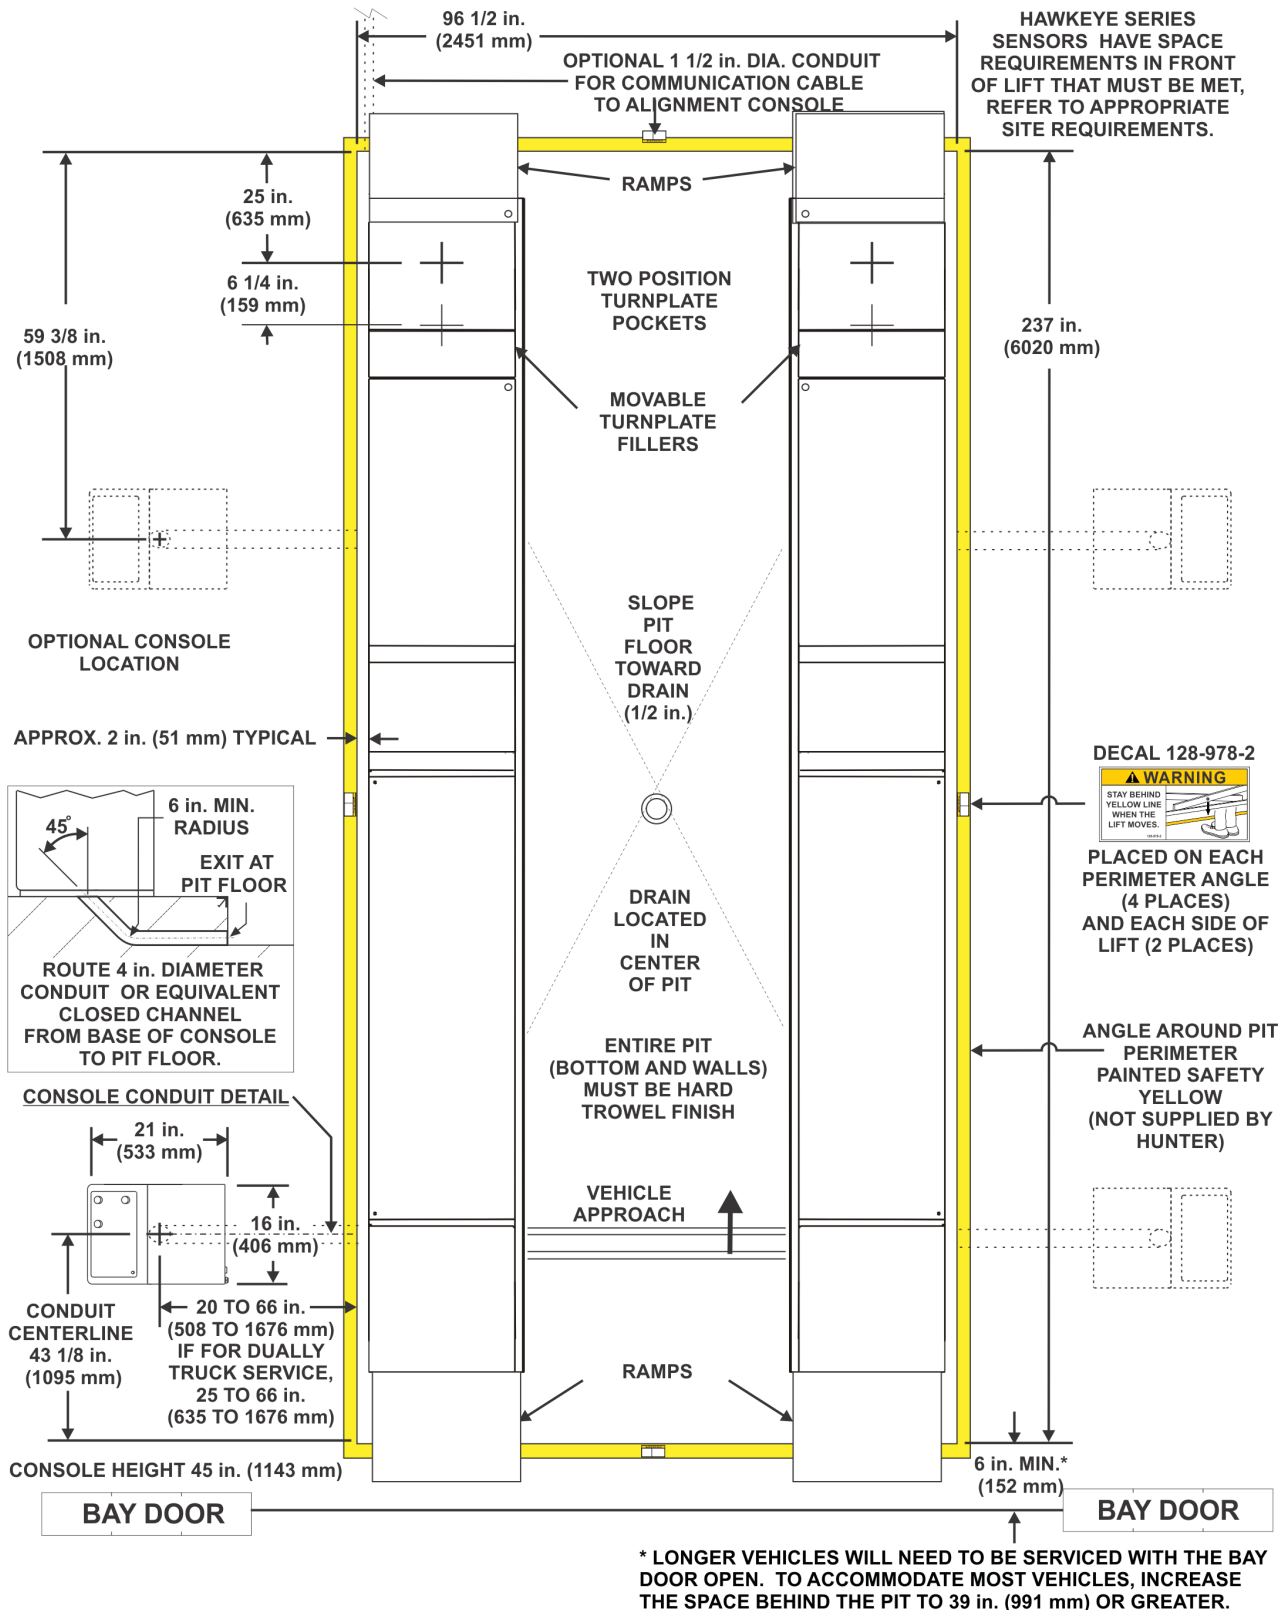

Dimensions shown are for end result. Tile thickness (if applicable) must be considered before pouring concrete. Positioning of control console is limited to a maximum space between console and rack of 5 1/2 feet (1676 mm) at the approach ramp end and 16 feet (4877 mm) at the turnplate end.